QUICK TOUR

Accurate Tracking | Easy Installation



Please carefully read the user guide before use in order to quickly get the right to operate. Product appearance, color and accessories are subject to change without prior notice in this manual!

1) Functions and Product parameters

- ◆ GPS continuous positioning and GPRS timing report
- ♦ illegal cutting line alarm ♦ Support SMS query
- ◆ Intelligent anti-theft
- ◆ Vibration/Displacement/Power off/over speed alert

Frequency				
	GSM 850/900/1800/1900MHz			
Networks	GSM/GPRS			
Backup Battery	3.7V 80mAh			
Operating voltage	10-40V			
Location time	Cold start 35s-80s			
	Hot start 1s			
Location accuracy	5 meters			
Operating temperature	-20℃~+55℃			
Dimension	45*40*25mm			
Weight	28g			

NOTE: When the equipment in power saving sleep mode, the light will turn off after about 10 minutes(settable) without any operation.

2 Start up



- $(\ I\)$ $\$ Open the cover, Insert a micro SIM card support GSM/GPRS network into device follow the above picture.
 - (II) Connect to the OBD port in the car.
- $(\hbox{\tt III})$ Set admin number, by sending a SMS command to the SIM card inside device.

For example: admin123456 +86186******* (+86186******should be your phone number)

 $({\rm IV}\,)$ Set APN: APN123456 CMNET (please use your local APN instead of CMNET,if you do not know the APN content,you should contact your SIM card supplier)


3 More Commands

Function	Command Format	Reply	Delete	for example
APN	apn+123456+space+conte nt	apn ok		apn123456 cmnet
	apnuser+123456+space+c ontent	apnuser ok		
	apnpasswd+123456+space +content	apnpass wd ok		
admin number	admin123456+space+admi n phone number	admin ok	noadmin 123456	admin123456 186******
time zone	timezone+123456+space+ GMT No.	timezone ok		timezone123456 +1
time sleep	sleep123456 time	sleep time ok		
shock sleep(defa ult)	sleep123456 shock	sleep shock ok		
no sleep	sleep123456 off	sleep off ok		
upload frequency	upload123456+space+time	upload ok		upload123456 10
Arm&Disar m	111 or SF	Arm delay in 0s	000 or CF	
Position	G123456# or where	Google map		
Restart	rst	restart ok		
Back to factory	format	No reply		

4 Login by Tracking Website and Phone APP

Login by Website:

- 1. Open the website: gps.tk-star.com
- 2.Login by username or the IMEI/ID, the default password "123456" and Clink "GO" $\,$

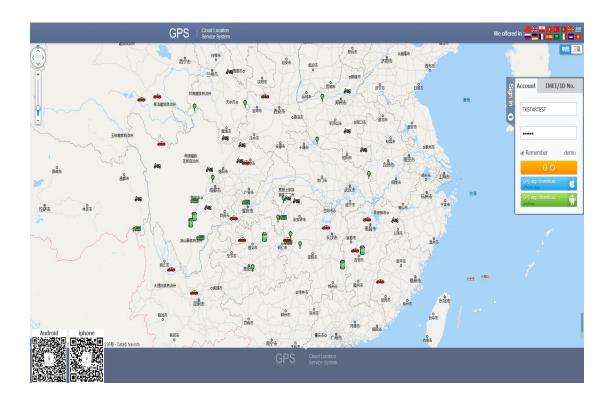

A,Download Phone APP:

Method 1: Scan below QR to download;



Method 2: search "**TKSTAR GO**" in the APP store or Google play store to download



以 你加到小麼中

Select "Log in by IMEI" on the bottom of screen

Server: gps.tk-star.com

IMEI/ID: on the back side of device

Password: 123456

(5) Faults & The solutions

Q: Start up Fail?

A: Check the cable connect right or not.

Q: The device can not obtain location information?

A: Place the unit at the open area to test.

Q: How to choose SIM card?

A: the SIM card must support GSM&GPRS, and ensure that the card has enough currency and credit.

Q: How to use in the foreign countries?

A: please set the APN before use, please edit the text "APN123456

CMNET "and send it to the SIM card of the device, CMNET is Chinese operator's APN, Replace the corresponding APN when use in other countries, APN details, please consult your local SIM card carrier.

6 Cautions

Please comply with the instructions to extend the unit life:

- 1. Keep the unit dry. Any liquid, i.e. rain, moisture, may destroy or damage the inside circuitry.
- 2. Don't use & store the unit in dusty places.
- 3. Don't put the unit in overheated or over cooled places.
- 4. Handle carefully. Don't vibrate or shake it violently.
- 5. Clear the unit with a piece of dry cloth. Don't clean in chemicals, detergent.
- 6. Don't paint the unit, this may cause some foreign materials left in between the parts.
- 7. Don't disassemble or refit the unit.
- 8. Please use the battery and charger provided by manufacturer.
 Using other batteries and chargers will cause unwanted situation.